

# Thermal Transfer Ribbons for T5000

WAX

WAX/RESIN

RESIN



## RIBBONS DESIGNED FOR USE IN:

- 4" models up to 110mm wide
- 6" models up to 171mm wide
- 8" models up to 220mm wide
- RFID models

3040 Saturn Street, Ste. 200  
Brea, CA 92821  
Tel: 657-258-0816  
Fax: 657-258-0817


[PrintronixAutoID.com](http://PrintronixAutoID.com)

# THERMAL TRANSFER RIBBONS

Supported by a full range of ink formulations, you can be confident that your Genuine Printronix Auto ID ribbon will meet the demands of your label printing application. Enjoy consistent, premium quality and optimized performance through your Printronix Auto ID printer.

The Printronix Auto ID range of thermal transfer ribbons:


## 8050 – STANDARD WAX

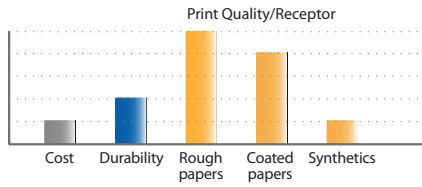

- Widely used for barcode applications
- Provides excellent print quality
- Suitable for standard labeling applications
- Compatible with most coated and non-coated paper labels

Part No.	Width	Length	Rolls/ctn	Part No.	Width	Length	Rolls/ctn
257672-001	60mm / 2.36"	625m / 2051ft	6	257672-005	152.4mm / 6.00"	625m/2051ft	6
257672-002	83mm / 3.27"	625m / 2051ft	6	257672-100	165.0mm / 6.50"	625m/2051ft	6
257672-003	110.0mm / 4.33"	625m / 2051ft	6	257672-006	171.0mm / 6.73"	625m/2051ft	6
257672-004	130.0mm / 5.12"	625m / 2051ft	6	257672-007	220.0mm / 8.66"	625m/2051ft	6


## 8300 – PREMIUM WIDE SPECTRUM WAX

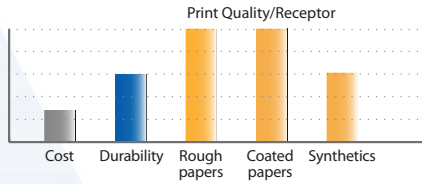

- Resin-enhanced wax
- Best scratch and smudge resistance for a wax ribbon
- Supports high speed printing
- Excellent print quality on all papers and some film materials

Part No.	Width	Length	Rolls/ctn	Part No.	Width	Length	Rolls/ctn
175391-101	60mm / 2.36"	625m / 2051ft	6	175391-105	152.4mm / 6.00"	625m/2051ft	6
175391-102	83mm / 3.27"	625m / 2051ft	6	175391-108	165.0mm / 6.50"	625m/2051ft	6
175391-103	110.0mm / 4.33"	625m / 2051ft	6	175391-106	171.0mm / 6.73"	625m/2051ft	6
175391-104	130.0mm / 5.12"	625m / 2051ft	6	175391-107	220.0mm / 8.66"	625m/2051ft	6


## 8500 – STANDARD WAX/RESIN

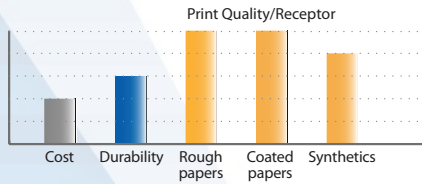

- General purpose wax/resin formulation
- Superior print quality on all common papers and films. Our most versatile formulation
- Prints at low temperatures and high speed

Part No.	Width	Length	Rolls/ctn	Part No.	Width	Length	Rolls/ctn
203485-101	60mm / 2.36"	625m / 2051ft	6	203485-105	152.4mm / 6.00"	625m/2051ft	6
203485-102	83mm / 3.27"	625m / 2051ft	6	203485-108	165.0mm / 6.50"	625m/2051ft	6
203485-103	110.0mm / 4.33"	625m / 2051ft	6	203485-106	171.0mm / 6.73"	625m/2051ft	6
203485-104	130.0mm / 5.12"	625m / 2051ft	6	203485-107	220.0mm / 8.66"	625m/2051ft	6


## 8550 – PREMIUM WAX/RESIN

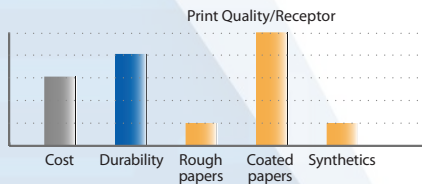

- Designed to print on a wide range of coated papers and films
- Enhanced abrasion and scratch resistance
- Very sharp print quality, enabling ladder and rotated barcode printing simultaneously

Part No.	Width	Length	Rolls/ctn	Part No.	Width	Length	Rolls/ctn
203713-101	60mm / 2.36"	625m / 2051ft	6	203713-105	152.4mm / 6.00"	625m/2051ft	6
203713-102	83mm / 3.27"	625m / 2051ft	6	203713-111	165.0mm / 6.50"	625m/2051ft	6
203713-103	110.0mm / 4.33"	625m / 2051ft	6	203713-106	171.0mm / 6.73"	625m/2051ft	6
203713-104	130.0mm / 5.12"	625m / 2051ft	6	203713-107	220.0mm / 8.66"	625m/2051ft	6


## 8600 – SPECIALTY RESIN

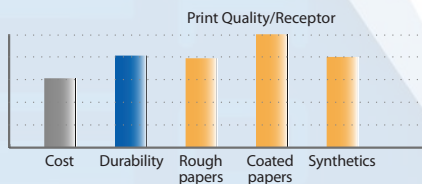

- Excellent mechanical resistance, including abrasion and scratch
- Extensive adaptability to a wide range of materials
- Supports higher print speeds

Part No.	Width	Length	Rolls/ctn	Part No.	Width	Length	Rolls/ctn
203486-101	60mm / 2.36"	625m / 2051ft	6	203486-105	152.4mm / 6.00"	625m/2051ft	6
203486-102	83mm / 3.27"	625m / 2051ft	6	203486-110	165.0mm / 6.50"	625m/2051ft	6
203486-103	110.0mm / 4.33"	625m / 2051ft	6	203486-106	171.0mm / 6.73"	625m/2051ft	6
203486-104	130.0mm / 5.12"	625m / 2051ft	6	203486-107	220.0mm / 8.66"	625m/2051ft	6


## 8650 – STANDARD RESIN

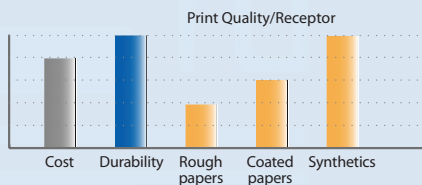

- Adaptable to wide range of label materials
- Support high speed printing
- Very high resistance to solvents and abrasion

Part No.	Width	Length	Rolls/ctn	Part No.	Width	Length	Rolls/ctn
204981-101	60mm / 2.36"	625m / 2051ft	6	204981-105	152.4mm / 6.00"	625m/2051ft	6
204981-102	83mm / 3.27"	625m / 2051ft	6	204981-106	165.0mm / 6.50"	625m/2051ft	6
204981-103	110.0mm / 4.33"	625m / 2051ft	6	204981-108	171.0mm / 6.73"	625m/2051ft	6
204981-104	130.0mm / 5.12"	625m / 2051ft	6	204981-107	220.0mm / 8.66"	625m/2051ft	6

## 8770 – ULTRA DURABLE RESIN

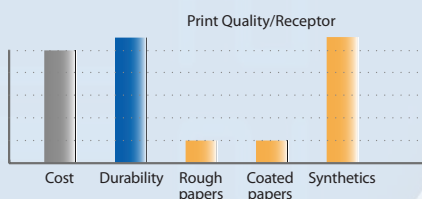

- Developed from extreme environment labeling
- Unmatched scratch and solvent resistance
- Maximum durability

Part No.	Width	Length	Rolls/ctn	Part No.	Width	Length	Rolls/ctn
179390-101	60mm / 2.36"	625m / 2051ft	6	179390-105	152.4mm / 6.00"	625m/2051ft	6
179390-102	83mm / 3.27"	625m / 2051ft	6	179390-115	165.0mm / 6.50"	625m/2051ft	6
179390-103	110.0mm / 4.33"	625m / 2051ft	6	179390-106	171.0mm / 6.73"	625m/2051ft	6
179390-104	130.0mm / 5.12"	625m / 2051ft	6	179390-107	220.0mm / 8.66"	625m/2051ft	6